


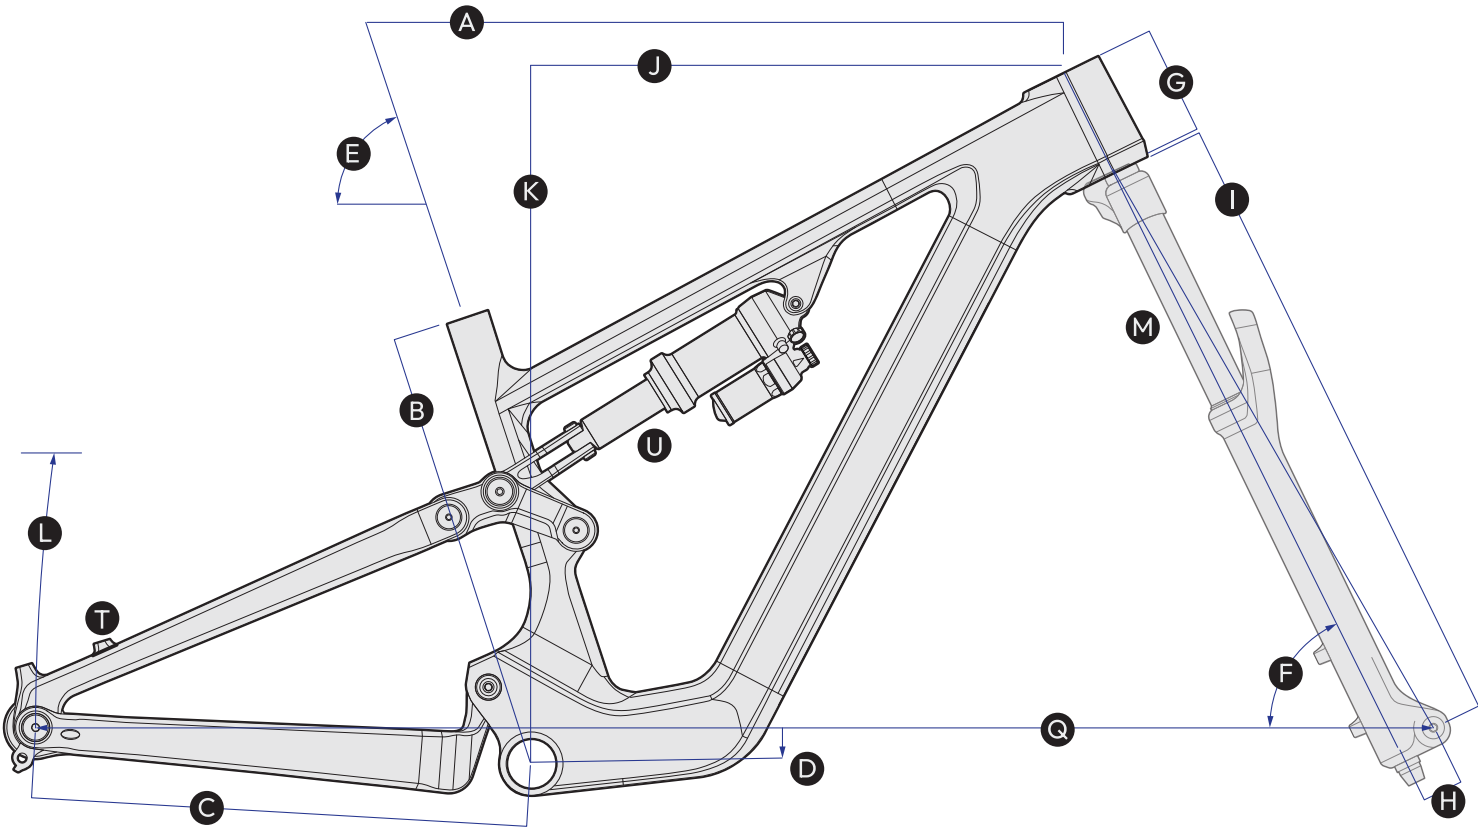

K **G** 170F/29

FRAME SPECIFICATIONS		S	M	L	TECH SPECIFICATIONS		ALL
A	TOP TUBE LENGTH EFFECTIVE	580	605	625	U	TT MOUNT [SHOCK LENGTH-STROKE]	230-65
B	SEAT TUBE LENGTH	380	410	430	V	MAX TIRE SIZE	29x2.6
C	CHAINSTAY LENGTH	448	448	448	W	MIN TIRE SIZE	27.5x2.6
D	BB DROP	34	34	34	X	HS UPPER & LOWER CUPS 0 AND +/-5MM	68/56
E	SEAT TUBE ANGLE	77°	77°	77°	Y	HEADSET BEARING - INTERNAL	52/52
F	HEAD TUBE ANGLE	63°	63°	63°	Z	BOTTOM BRACKET	T47 BSA 89.5
G	HEAD TUBE LENGTH	100	115	125	AA	CHAINLINE SPEC	52-55
H	FORK OFFSET	42-44	42-44	42-44	AB	CHAINRING RANGE (OVAL 34T MAX-MIN 30T)	30-36T
I	FORK AC	581	581	581	AC	CRANKSET LENGTH	155-165MM
J	REACH (ADJUSTABLE)	440-445-450	470-475-480	495-500-505			
K	STACK	620	635	645	MAX TIRE CLEARANCE		
L	REAR TRAVEL [148/12 OLD]	165	165	165			
M	FORK TRAVEL	170	170	170			
N	SEAT TUBE ID	34.9	34.9	34.9			
O	MAX DROPPER POST USE	240	240	240			
P	SEAT TUBE OD	38	38	38			
Q	WHEELBASE	1265	1290	1310			
R	STANDOVER HEIGHT	745	755	760			
S	BB HEIGHT	345	345	345			
T	BRAKE MT PM180-203 [220 MAX]	180	180	180			

▲ SIZE RECOMMENDATION [S 150-170CM] [S 165-185CM] [S 175-220CM]

ALL FRAME MEASUREMENTS UNITS IN MILLIMETERS [xMM]

