


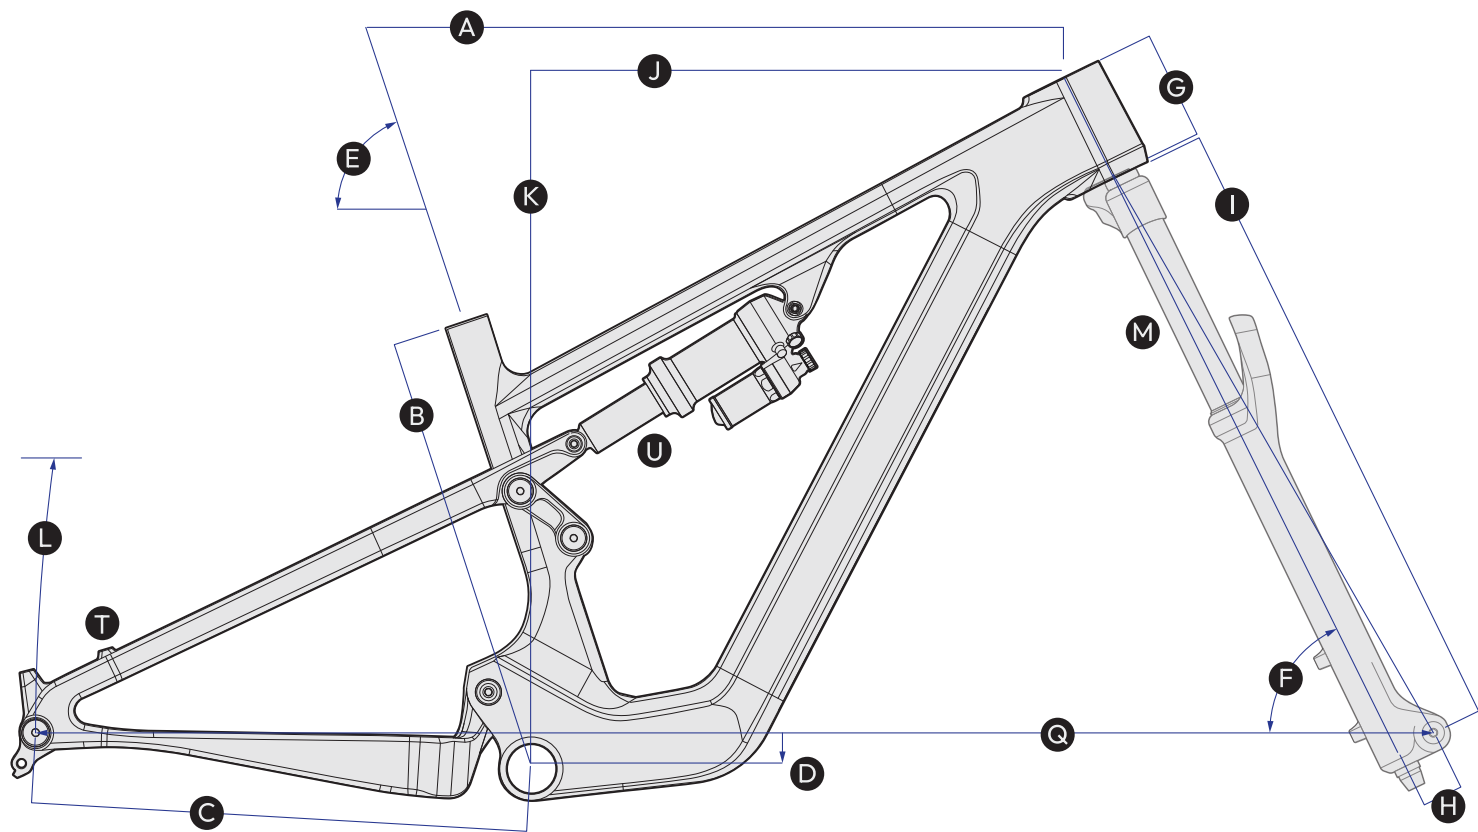

150F/29

| FRAME SPECIFICATIONS |                           | S           | M           | L           | TECH SPECIFICATIONS           |                                        | ALL          |
|----------------------|---------------------------|-------------|-------------|-------------|-------------------------------|----------------------------------------|--------------|
| A                    | TOP TUBE LENGTH EFFECTIVE | 590         | 620         | 640         | U                             | TT MOUNT [SHOCK LENGTH-STROKE]         | 230-60       |
| B                    | SEAT TUBE LENGTH          | 380         | 410         | 430         | V                             | MAX TIRE SIZE                          | 29x2.6       |
| C                    | CHAINSTAY LENGTH          | 448         | 448         | 448         | W                             | MIN TIRE SIZE                          | 27.5x2.6     |
| D                    | BB DROP                   | 34          | 34          | 34          | X                             | HS UPPER & LOWER CUPS 0 AND +/-5MM     | 68/56        |
| E                    | SEAT TUBE ANGLE           | 77.8°       | 77.8°       | 77.8°       | Y                             | HEADSET BEARING - INTERNAL             | 52/52        |
| F                    | HEAD TUBE ANGLE           | 64.5°       | 64.5°       | 64.5°       | Z                             | BOTTOM BRACKET                         | T47 BSA 89.5 |
| G                    | HEAD TUBE LENGTH          | 100         | 115         | 125         | AA                            | CHAINLINE SPEC                         | 52-55        |
| H                    | FORK OFFSET               | 42-44       | 42-44       | 42-44       | AB                            | CHAINRING RANGE (OVAL 34T MAX-MIN 30T) | 30-36T       |
| I                    | FORK AC                   | 561         | 561         | 561         | AC                            | CRANKSET LENGTH                        | 155-165MM    |
| J                    | REACH (ADJUSTABLE)        | 440-445-450 | 470-475-480 | 495-500-505 |                               |                                        |              |
| K                    | STACK                     | 605         | 620         | 630         | <div>MAX TIRE CLEARANCE</div> |                                        |              |
| L                    | REAR TRAVEL [148/12 OLD]  | 150         | 150         | 150         |                               |                                        |              |
| M                    | FORK TRAVEL               | 150         | 150         | 150         |                               |                                        |              |
| N                    | SEAT TUBE ID              | 34.9        | 34.9        | 34.9        |                               |                                        |              |
| O                    | MAX DROPPER POST USE      | 240         | 240         | 240         |                               |                                        |              |
| P                    | SEAT TUBE OD              | 38          | 38          | 38          |                               |                                        |              |
| Q                    | WHEELBASE                 | 1265        | 1290        | 1310        |                               |                                        |              |
| R                    | STANDOVER HEIGHT          | 745         | 755         | 760         |                               |                                        |              |
| S                    | BB HEIGHT                 | 335         | 335         | 335         |                               |                                        |              |
| T                    | BRAKE MT PM180 MAX        | 180         | 180         | 180         |                               |                                        |              |

▲ SIZE RECOMMENDATION [S 150-170CM] [S 165-185CM] [S 175-220CM]

ALL FRAME MEASUREMENTS UNITS IN MILLIMETERS [MM]

