


160F/29

FRAME SPECIFICATIONS		S	M	L	TECH SPECIFICATIONS		
A	TOP TUBE LENGTH EFFECTIVE	599	629	662	U	TRUNNION MOUNT [SHOCK LENGTH-STROKE]	205-62.5
B	SEAT TUBE LENGTH	360	410	460	V	MAX TIRE SIZE	29x2.6
C	CHAINSTAY LENGTH	448	448	448	W	MIN TIRE SIZE	27.5x2.6
D	BB DROP	23.5	23.5	23.5	X	HEAD TUBE HS UPPER / LOWER ID	56/56
E	SEAT TUBE ANGLE	76.1°	76.1°	76.1°	Y	CRANK SPLINE	ISIS EBIKE
F	HEAD TUBE ANGLE	64.6°	64.6°	64.6°	Z	CHAINLINE SPEC & MAX CHAINRING	52-53
G	HEAD TUBE LENGTH	95	105	120	AA	ENGINE MAXON BIKEDRIVE AIR 1.8Kg	30 Nm
H	FORK OFFSET	42-44	42-44	42-44	AB	MAIN BATTERY MAXON BIKEDRIVE AIR 1.2 Kg	250 Wh
I	FORK AC	571	571	571	AC	RANGE EXTENDER 1.2Kg [OPTIONAL]	252 Wh
J	REACH	436	466	495			
K	STACK	609	619	633			
L	REAR TRAVEL [148/12 OLD]	145	145	145	<b>MAX TIRE CLEARANCE</b>		
M	FORK TRAVEL	160	160	160			
N	SEAT TUBE ID	34.9	34.9	34.9			
O	MAX DROPPER POST USE	200	220	240			
P	SEAT TUBE OD	38	38	38			
Q	WHEELBASE	1201	1235	1271			
R	STANDOVER HEIGHT	791	791	791			
S	BB HEIGHT	351	351	351			
T	BRAKE MOUNT PM180 [203 MAX]	180	180	180			

### MAX TIRE CLEARANCE

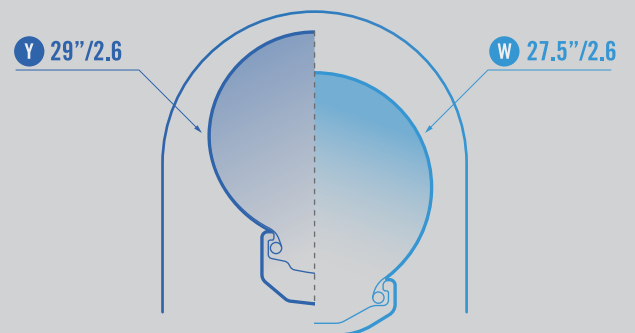

ALL FRAME MEASUREMENTS UNITS IN MILLIMETERS [mm]

